

# ATENEA D-130S LED

LUMINARIA ATENEA D-130S LED CUERPO DE INYECCION DE ALUMINIO. IDEAL PARA CUALQUIER ENTORNO URBANO. CON UN DISEÑO ELEGANTE Y FUNCIONAL, ALTA RESISTENCIA A LA CORROSION Y OXIDO GRACIAS A SU CUERPO DE ALUMINIO INYECTADO. ADEMÁS DE INCLUIR JUNTA DE ESTANQUEIDAD CON TORNILLERÍA DE ACERO INOXIDABLE Y LACADO EXTERIOR AL HORNO 200° POLVO DE POLIÉSTER TERMINACION GRIS RAL 7035. FIJACION A COLUMNA O BRAZO 60Ø. EQUIPADA CON MÓDULO LED CREE XTE R4-30W-45W-60W-75W-90W-100W-120W. CON HASTA 140LM-W. OPCIONAL ES EQUIPADO UN PROTECTOR DE SOBRETENSIONES 10KV. POSIBILIDAD OPCIONAL DE INCORPORAR DRIVER REGULABLE 1.10V CON HASTA 8 NIVELES DE REGULACION SMARCYTI. AUTOMÁTICA Y MEMORIZADA O MEDIANTE REGULACION LINEA DE MANDO EN CABECERA. CUMPLIMIENTO NORMAS: UNE-EN 55015:2013-UNE-EN 61547:2009-UNE-EN 6100-3-2:2014-UNE-EN 6100-3-3:2013/ UNE EN 60598-1/2-3

**FAYCOBA**<sup>®</sup>  
Alumbrado público LED  
**GRANADA-SPAIN**  
958-420-356  
www.faycoba.com



**OPCIONAL LUZ AMBAR 2200K**



**OPCIONAL DRIVER REGULABLE 1.10V O REGULACION PROGRAMABLE 8 ETAPAS.**



**HIGH EFFICIENCY 140LM-W**





**BRAZO UNIVERSAL 1000M/M-1500M/M**

## ATENEA D-130SLED

**■ D-130S LED CREE XTE R4 30W 45W-60W-75W-90W-100W-120W**

**■ ATENEA D-130S E-27/E-40 IP-65. POTENC. MAXIMA 150W**

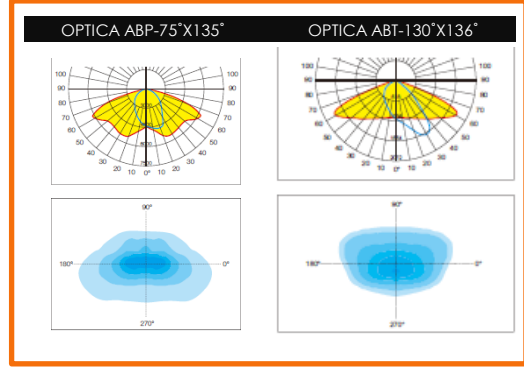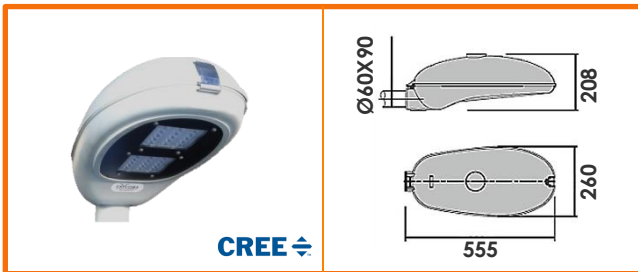

CODE CODIGO	LAMP LAMPARA	OUTPUT POWER POTENCIA	LED PCS Nº DE LED	LUMEN LUMENES	KG
D-130S IP65	HPS/MH	35-150W	/	/	5KG
D-130S LED-30W	LED	30W	24	4200LM	5,2KG
D-130S LED-45W		45W	24	6300LM	5,3KG
D-130S 60W/75W	LED	60W	24,LED,S	8400LM	5,3G
		75W	48,LED,S	10.500LM	5,6KG
D-130S LED-90W	LED	90W	48	12.600LM	5,6KG
D-130S LED-100W	LED	100W	48	14.000LM	5,6KG
D-130S LED-120W	LED	120W	48	16.800LM	5,6KG



**SGS** SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

**TEST REPORT**

For the following samples submitted and identified as listed at the bottom of this report.

Application No.: 2014060401975027

Page: 1 of 8

**TEST REPORT**

The following samples were submitted and identified as listed at the bottom of this report.

Application No.: 2014060401975027

Page: 1 of 8

**TEST REPORT**

The following samples were submitted and identified as listed at the bottom of this report.

Application No.: 2014060401975027

Page: 1 of 8

**SGS** SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

**VERIFICATION OF EMC COMPLIANCE**

Verification No.: GZEM1404001975027

Application No.: GZEM140703761LM

Applicant: Granadilla De Aguililla S.L. - FAYCOBA S.L.

Address of Applicant: POL. LOS ALAMOS C/O 2 FASE 16200 ARRIFF - GRANADA - SPAIN

Product Description: led module

Model No.: GZ0110202, GZ0112008

Trade Mark: FAYCOBA

Sufficient samples of the product have been tested and found to be in conformity with:

Test Standard: EN 55015:2013, EN 15047:2006, EN 61000-3-2:2014, EN 61000-3-3:2013.

As shown in the Test Report Number(s): GZEM1404001975027

The verification of EMC Compliance has been performed by the member based on the results of the tests, performed by members of SGS-CSTC Standards Technical Services Co., Ltd. on the basis of the product information submitted in accordance with the procedure of the member specific procedure under the contract 2014060401975027. The test was carried out in accordance with the requirements of the manufacturer, who complies with an EC Declaration of Conformity and compliance with relevant EC Directives.

Date: 2014-06-12

CE

Member of the SGS Group (SGS S.A.)

# ATENEA D-130S LED


## ATENEA D-130SLED



**HIGH EFFICIENCY**  
140LM-W



Cree® XLamp®





**D-130S LED CREE XTE R4 30W**  
**45W-60W-75W-90W-100W-120W**



**OPCIONAL DRIVER REGULABLE 1.10V**  
**0 REGULACION PROGRAMABLE.**



### OPTICA LED VIARIA 75°X135°

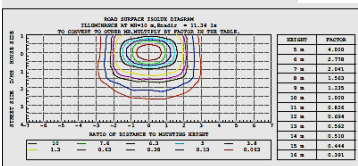

■ **DISPONIBLES A ELEGIR 2 TIPOS DE OPTICAS.**  
**OPTICA SIMETRICA: IDEAL PARA LA INSTALACION A BAJA Y MEDIA ALTURA DE 3 A 7MTS. PROYECTANDO LA EMISION DE LUZ 75° HACIA LA CALZADA Y 135° HACIA IZQUIERDA Y DERECHA. RECOMENDABLE PARA PLAZAS Y ZONAS PEATONALES, AVENIDAS.**

■ **OPTICA ASIMETRICA: IDEAL PARA ALTURAS DE 6 A 10MTS. PROYECTANDO LA EMISION DE LUZ 55° HACIA LA CALZADA. Y 145° DE IZQUIERDA Y DERECHA. RECOMENDABLE PARA CONSEGUIR UNA AMPLIA DISTANCIA ENTRE PUNTOS DE LUZ Y GRANDE AVENIDAS.**

### OPTICA LED ASIMETRICA 55°X145°

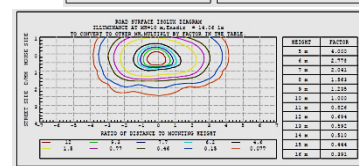



POTENCIAS	30W	45W	60W	75W	90W	100W	120W
TIPO LED	CREE XTE R4	CREE XTE R4	CREE XTE R4	CREE XTE R4	CREE XTE R4	CREE XTE R4	CREE XTE R4
FLUJO LUM.	4200LM	6300LM	8400LM	10.500LM	12.600LM	14.000LM	16.800LM
COLOR	2200K-3000K 4000K-6000K	2200K-3000K 4000K-6000K	3000K-4000K 6000K	2200K-3000K 4000K-6000K	2200K-3000K 4000K-6000K	3000K-4000K 6000K	3000K-4000K 6000K
CRI	>70Ra	>70Ra	>70Ra	>70Ra	>70Ra	>70Ra	>70Ra
ANG.APERTURA	75°135°/55°X145°	75°135°/55°X145	75°135°/55°X145	75°135°/55°X145	75°135°/55°X145	75°135°/55°X145	75°135°/55°X145
CORRIENTE SALIDA	550mA	550mA	750mA	1400mA	1640mA	1850mA	1950mA
VOLT.SALIDA	40-54V	40-54V	30-42V	40-54V	40-54V	40-54V	40-54V
GRAD.PROTEC.	IP-66	IP-66	IP-66	IP-66	IP-66	IP-66	IP-66
FACTOR POTENCIA	>0,98	>0,98	>0,98	>0,98	>0,98	>0,98	>0,98
IP-DRIVER	IP-67	IP-67	IP-67	IP-67	IP-67	IP-67	IP-67
GARANTIA	5 AÑOS	5 AÑOS	5 AÑOS	5 AÑOS	5 AÑOS	5 AÑOS	5 AÑOS

# Alumbrado publico

## CONJUNTOS COLUMNAS

### STREET LIGHT

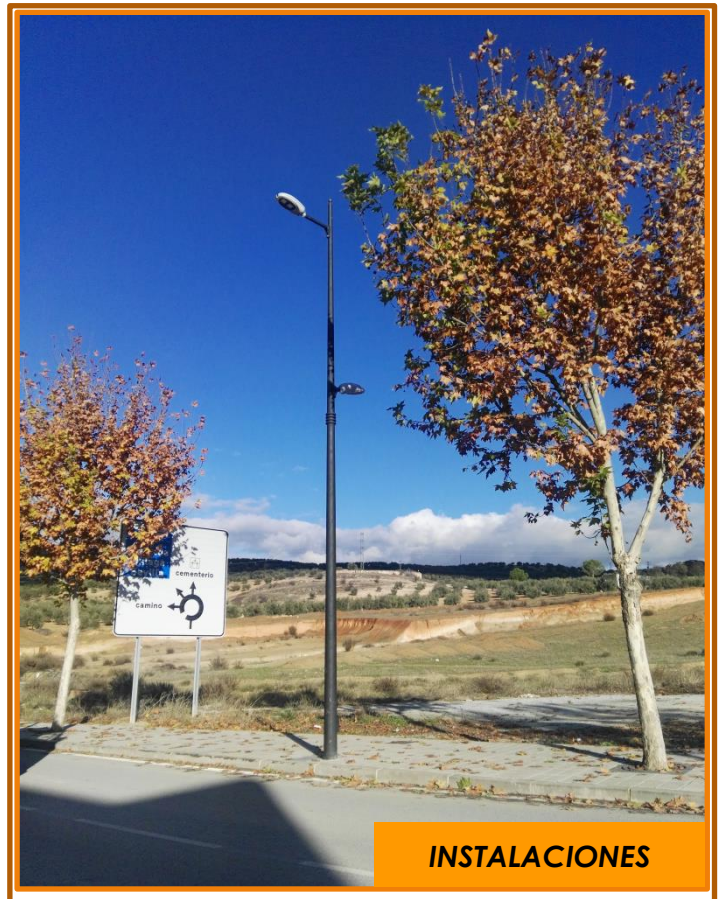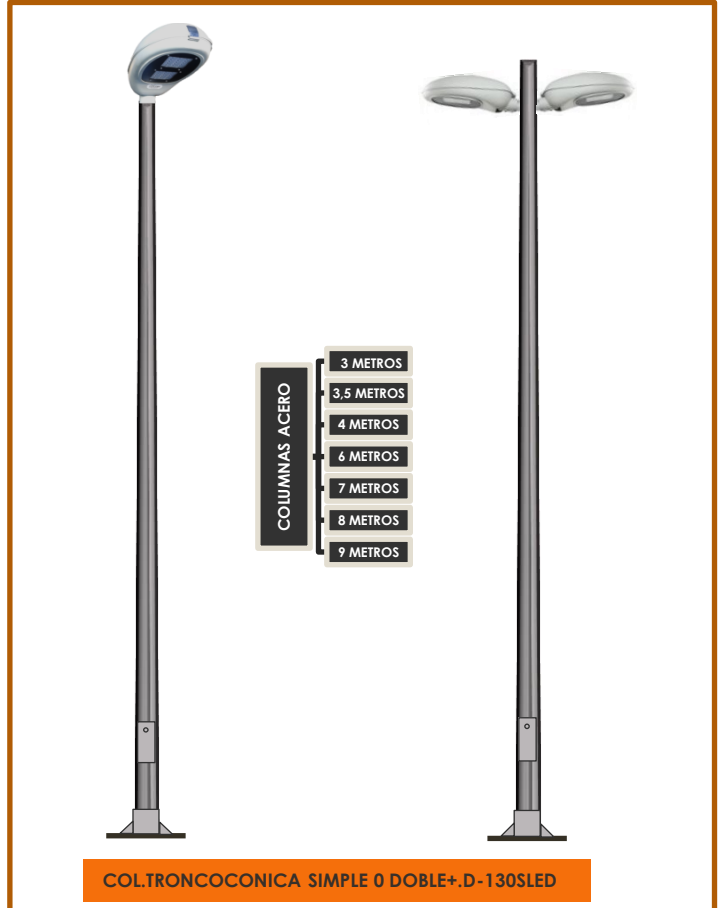

# Alumbrado publico

## CONJUNTOS COLUMNAS

### STREET LIGHT



-FABRICACION PROPIA-FAYCOBA-



# Alumbrado publico

## COLUMNAS TRONCOCONICAS

### STREET LIGHT



### CONJUNTOS COLUMNAS

**COLUMNAS TRONC.**

- 4 METROS
- 5 METROS
- 6 METROS
- 7 METROS
- 8 METROS
- 9 METROS

CLT-SB+D-130S LED      CLT-DB2+D-130S LED      CLT-DB2S+D-130S LED

**COLUMNAS TRONC.**

- 4 METROS
- 5 METROS
- 6 METROS
- 7 METROS
- 8 METROS
- 9 METROS

CLT-BL1+D-130S LED      CLT-BS2+D-130S LED      CLT-BC2S+D-130S LED

**COLUMNAS TRONC.**

- 4 METROS
- 5 METROS
- 6 METROS
- 7 METROS
- 8 METROS
- 9 METROS

**COLUMNAS TRONC.**

- 5 METROS
- 6 METROS
- 7 METROS
- 8 METROS
- 9 METROS

CLT-CR1+D-130S LED      CLT-BG2+D-130S LED      CLT-BM2S+D-130S LED      CLT-BS2S+D-130S LED