

DIABOLO T-020 LED

FAYCOBA
Alumbrado publico LED
GRANADA-SPAIN
958-420-356
www.faycoba.com

T-020 LED

LUMINARIA T-020 LED CUERPO DE INY. DE ALUMINIO Y DIFUSOR DE POLICARBONATO. IDEAL PARA CUALQUIER ENTORNO URBANO. CON UN DISEÑO ELEGANTE Y VANGUARDISTA, ALTA RESISTENCIA A LA CORROSION Y OXIDO GRACIAS A SU CUERPO DE ALUMINIO INYECTADO. ADEMÁS DE INCLUIR JUNTA DE ESTANQUEIDAD CON TORNILLERÍA DE ACERO INOXIDABLE Y LACADO EXTERIOR AL HORNO 200° POLVO DE POLIESTER TERMINACION OXIRON NEGRO RAL 9005 FIJACION A COLUMNA 60Ø. EQUIPADA CON MODULO LED CREE XTE R4- 30W-45W-60W CON HASTA 140LM-W. COMO OPCIONAL ES EQUIPADO UN PROTECTOR DE SOBRETENSIONES 10KV. POSIBILIDAD OPCIONAL DE INCORPORAR DRIVER REGULABLE 1.10V CON HASTA 8 NIVELES DE REGULACION SMARCYTI. AUTOMÁTICA Y MEMORIZADA O MEDIANTE REGULACION LINEA DE MANDO EN CABECERA. CUMPLIMIENTO NORMAS: UNE-EN 55015:2013-UNE-EN 61547:2009-UNE-EN 6100-3-2:2014-UNE-EN 6100-3-3:2013./UNE EN 60598-1/2-3



BRAZO PREMIUN
700m/m-1000m/m

LED



OPCIONAL LUZ AMBAR 2200K



OPCIONAL DRIVER REGULABLE 1.10V 0 REGULACION PROGRAMABLE 8 ETAPAS.




CREE



LUMINARIA T-020 LED
CREE XTE R4 30W-45W-60W.

HIGH EFFICIENCY
140LM-W

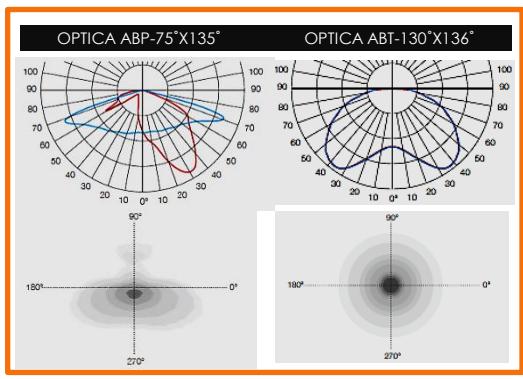

SGS SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

VERIFICATION OF EMC COMPLIANCE

Verification No.: GZEM14040218702V
Application No.: GZEM150703391LM
Applicant: Granada De Agente S.L. - FAYCOBA S
Address of Applicant: P.O. BOX ALAMOS C/O 2 FASE 1620-ATARFE - GRANADA - SPAIN
Product Description: LED module
Model No.: GZ0102002, GZ0102008
Trade Mark: FAYCOBA
Sufficient samples of the product have been tested and found to be in conformity with:
Test Standard: EN 55015:2013, EN 55017:2000, EN 61000-3-2:2014, EN 61000-3-3:2013.

As shown in the Test Report Number(s): GZEM14040218702V

This verification of EMC Compliance has been carried out on the basis of the test, performed by laboratory of SGS-CSTC Standards Technical Services Co., Ltd. in accordance with the EMC Directive and the EMC standards of the manufacturer. The manufacturer is responsible for the conformity of the product with the EMC standards of the manufacturer, and compliance with the EMC Directive and the EMC standards of the manufacturer.

TEST REPORT

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM14040218702V Page: 1 of 10

The following information was collected and included in the test as follows:

Manufacturer	Granada De Agente S.L. - FAYCOBA S
Model No.	GZ0102002, GZ0102008
Part No.	GZ0102002, GZ0102008
Order No.	GZ0102002, GZ0102008
Order Date	2014-04-02
Order Ref	2014-04-02
Order Ref	2014-04-02

In the configuration used, the EUT complies with the applicable specifications.

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

CODE CODIGO	LAMP LAMPARA	OUTPUT POWER POTENCIA	LED PCS Nº DE LED	LUMEN LUMENS	KG
T-020 E-27-E-40	HPS/MH	35-150W	/	/	6,3KG
T-020 LED-30W	LED	30W	24	4200LM	6,6KG
T-020 LED-45W		45W	24	6300LM	6,3KG
T-020 LED-60W		60W	24	8400LM	6,5KG

DIABOLO T-020 LED

LED



HIGH EFFICIENCY
140LM-W

CREE



- Material: Aluminio Inyectado..
- Dimensiones: 600X426m/m
- Difusor: Policarbonato Endurecido.
- Acabado: Al Horno Oxiron Negro.
- Recomendable Alturas De 3-5 mts..
- Potencia Led: 30w-45w-60w.
- Potencia Entrada: 110V-240V/50-60Hz.
- Tipo Led: CREE XTE R4-24 led,s
- Driver CE-Opcional Regulable 1,10v.
- Opcional: Protector De Sobretensiones 10kv.
- Nivel: IP65 IK08- Lumen:140lm-w.
- Clase electrica: Clase II
- Vida Led: 100.000H.
- NORMA: UNE EN 60598-1/2-3 H L80-B10


■ **DIABOLO T-020 LED CREE**
XTE R4 30W-45W-60W.




Cree® XLamp®



CREE



OPCIONAL DRIVER REGULABLE
1.10V O REGULACION PROGRAMABLE.

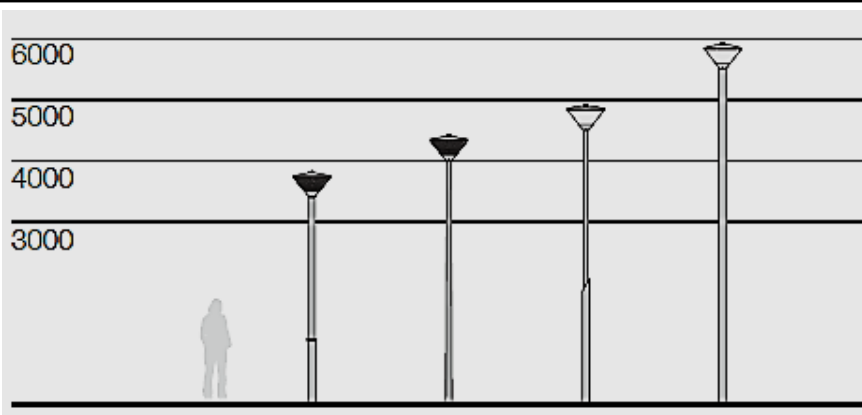


POTENCIAS	30W	45W	60W
TIPO LED	CREE XTE R4	CREE XTE R4	CREE XTE R4
FLUJO LUM.	4200LM	6300LM	8400LM
COLOR	2200K-3000K 4000K-6000K	2200K-3000K 4000K-6000K	2200K-3000K 4000K-6000K
CRI	>70Ra	>70Ra	>70Ra
ANG.APERTURA	75°135°/55°X145°	75°135°/55°X145°	75°135°
CORRIENTE SALIDA	550mA	550mA	750mA
VOLT.SALIDA	40-54V	40-54V	40-54V
GRAD.PROTEC.	IP-66	IP-66	IP-66
FACTOR POTENCIA	>0,98	>0,98	>0,98
IP-DRIVER	IP-67	IP-67	IP-67
GARANTIA	5 AÑOS	5 AÑOS	5 AÑOS

STREET LIGHT



-FABRICACION PROPIA-FAYCOBA-

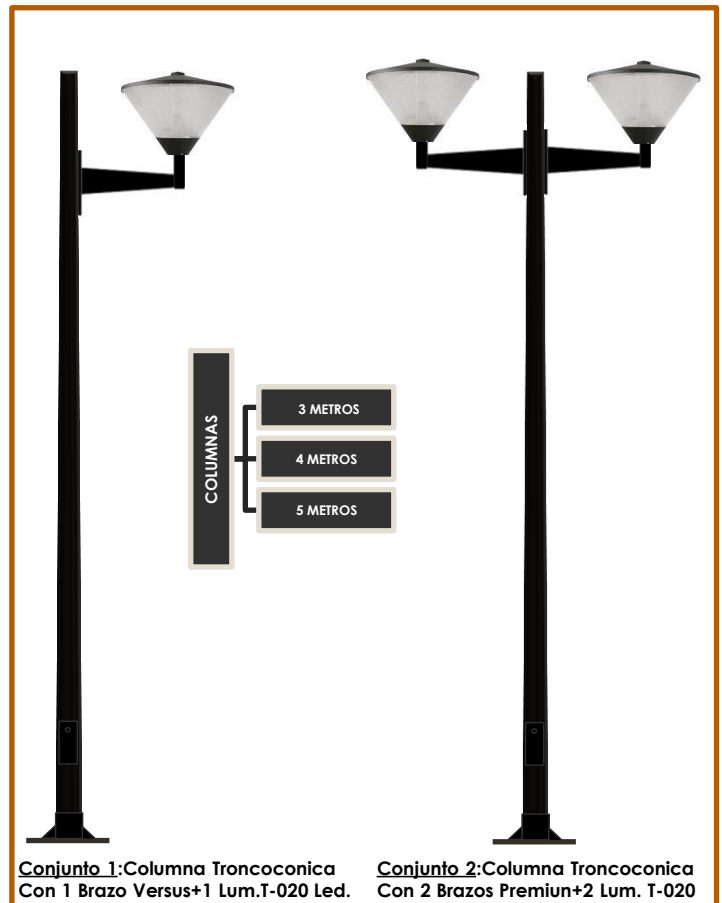



BRAZO PREMIUN

**BRAZO CURVO VALIDO PARA PARED O COLUMNAS.
DISPONIBLE EN MEDIDAS DE 700m/m-
1000m/m
GALVANIZADO EN-UNE-1461 PINTADO AL
HORNO 200° RAL A ELEGIR POR CLIENTE.
PESO: 7KG**



LED



**OPCIONAL
ESCUDO MUNICIPAL**

LED

CREE ⇄

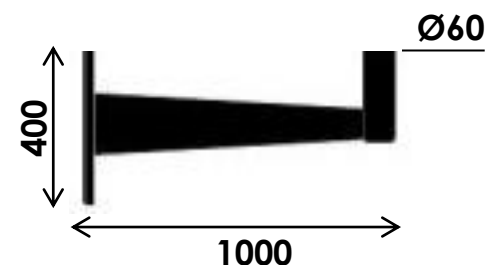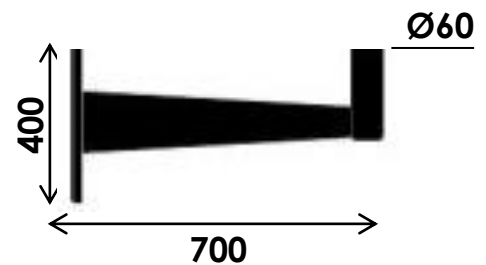

LUMINARIA DIABOLO T-020