

INCA T-190A

FAYCOBA®
Alumbrado publico LED

GRANADA-SPAIN
958-420-356


www.faycoba.com

INCA T-190A LED

LUMINARIA INCA T-190A LED CUERPO DE INYECCION DE ALUMINIO. IDEAL PARA CUALQUIER ENTORNO URBANO. CON UN DISEÑO ELEGANTE Y VANGUARDISTA, ALTA RESISTENCIA A LA CORROSION Y OXIDO GRACIAS A SU CUERPO DE ALUMINIO INYECTADO. ADEMÁS DE INCLUIR JUNTA DE ESTANQUEIDAD CON TORNILLERÍA DE ACERO INOXIDABLE Y LACADO EXTERIOR AL HORNO 200° POLVO DE POLIESTER TERMINACION GRIS RAL 9007. FIJACION A COLUMNA 60Ø. EQUIPADA CON MODULO LED CREE XTE R4-30W-45W-60W. CON HASTA 140LM-W. COMO OPCIONAL ES EQUIPADO UN PROTECTOR DE SOBRETENSIONES 10KV. POSIBILIDAD OPCIONAL DE INCORPORAR DRIVER REGULABLE 1.10V CON HASTA 8 NIVELES DE REGULACION SMARCYTI. AUTOMÁTICA Y MEMORIZADA O MEDIANTE REGULACION LINEA DE MANDO EN CABECERA. CUMPLIMIENTO NORMAS: UNE-EN 55015:2013-UNE-EN 61547:2009-UNE-EN 61000-3-2:2014-UNE-EN 61000-3-3:2013 UNE EN 60598-1/2-3



INCA T-190A LED



OPCIONAL DRIVER REGULABLE 1.10V 0 REGULACION PROGRAMABLE 8 ETAPAS.

BRAZO VERSUS
700m/m-1000m/m



CREE

Cree® XLamp®



HIGH EFFICIENCY
140LM-W

INCA T-190A LED
CREE XTE R4 30W-45W-60W

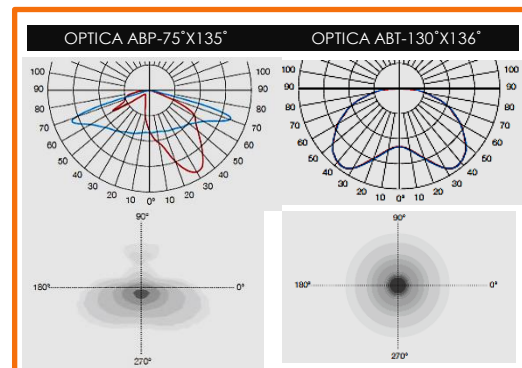

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

100 Henry Road, Shenzhen/Fan Guangping, Guangzhou, Guangdong, China 510663
Tel: +86-20-22085172
Fax: +86-20-22085173
Email: sgsgroup@sgs.com

VERIFICATION OF EMC COMPLIANCE

Verification No.: GZEM140402187502V
Application No.: GZEM1507033791LM
Applicant: Granada De Aprovechamiento S.L. - FAYCOBA S
Address of Applicant: P.O. LOS ALAMOS C/O 2 FASE 19200-VANAFE - GRANADA - SPAIN

Product Description: led module
Model No.: GZ0102002, GZ0102008
Trade Mark: FAYCOBA
Sufficient samples of the product have been tested and found to be in conformity with:
Test Standard: EN 5515:2013, EN 55167:2009, EN 61000-3-2:2014, EN 61000-3-3:2013.

As shown in the Test Report Number(s): GZEM140402187502

This verification of EMC Compliance has been carried out on the basis of the test, performed in conformity with the EMC Directive (2002/95/EC) and the EMC Directive (2004/108/EC). The EMC Directive (2004/108/EC) is a harmonization measure in order to ensure the interoperability of the products, and compliance with the EMC Directive (2002/95/EC) and the EMC Directive (2004/108/EC) is a condition for the CE marking.



Copyright © 2014 by SGS-CSTC Standards Technical Services Co., Ltd. All rights reserved. This report is the property of SGS-CSTC Standards Technical Services Co., Ltd. and may not be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of SGS-CSTC Standards Technical Services Co., Ltd.



CODE CODIGO	LAMP LAMPARA	OUTPUT POWER	LED PCS Nº DE LED	LUMEN LUMENES	MEDIDAS	Ø
INCA T-190A 30W	LED	30W	24	4200LM	500*500*607	60Ø
INCA T-190A 45W		45W	24	6300LM	500*500*607	60Ø
INCA T-190A 60W		60W	24	8400LM	500*500*607	60Ø

INCA T-190A




- Material: Inyección De Aluminio.
- Dimensiones: 500X607m/m
- Acabado: Gris Ral 9007
- Recomendable Alturas De 3-6 mts..
- Potencia Led: 30w-45w-60w
- Potencia Entrada: 110V-240V/50-60Hz
- Tipo Led: CREE XTE R4-24Led,s.
- Driver IP67-Opcional Regulable 1,10v.
- Opcional: Protector Sobretensiones 10kv.
- Nivel: IP66 IK09 – Lumen: 140lm-w
- Clase Electrica: Clase II
- Vida Led: 100.000H
- NORMA: **UNE EN 60598-1/2-3 H L80-B10**



■ **SETEC T-190B LED**
CREE XTE R4 30W-45W-60W

OPCIONAL DRIVER REGULABLE 1.10V DE SERIE

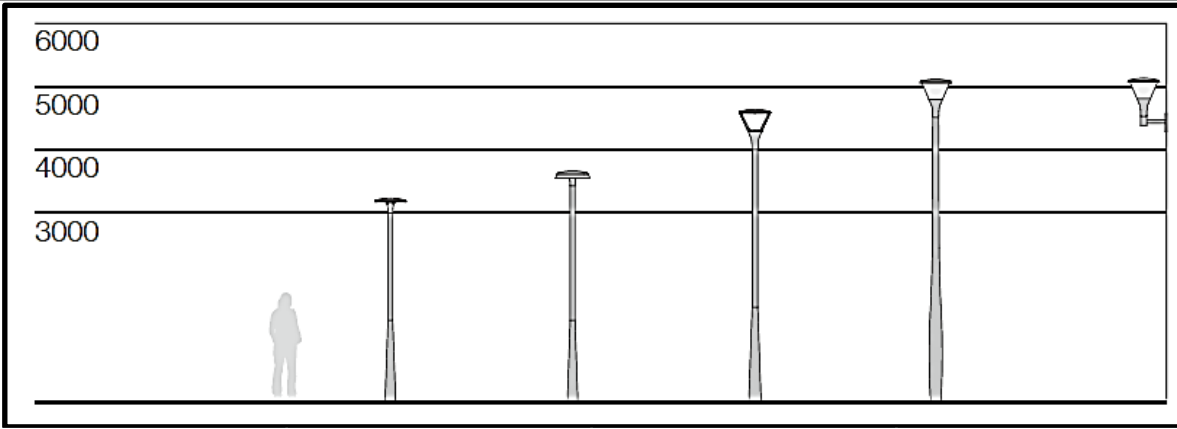

POTENCIAS	30W	45W	60W
TIPO LED	CREE XTE R4	CREE XTE R4	CREE XTE R4
FLUJO LUM.	4200LM	6300LM	8400LM
COLOR	2200-3000K 4000K-6000K	2200-3000K 4000K-6000K	3000K-4000K 2200K-6000K
CRI	>70Ra	>70Ra	>70Ra
ANG.APERTURA	75°/135°/130°X136°	75°/135°/130°X136°	75°/135°/130°X136°
CORRIENTE SALIDA	550mA	550mA	750mA
VOLT.SALIDA	40-54V	40-54V	40-54V
GRAD.PROTEC.	IP-66	IP-66	IP-66
FACTOR POTENCIA	>0,98	>0,98	>0,98
IP-DRIVER	IP-67	IP-67	IP-67
GARANTIA	5 AÑOS	5 AÑOS	5 AÑOS



Alumbrado publico

CONJUNTOS COLUMNAS

STREET LIGHT



-FABRICACION PROPIA-FAYCOBA-

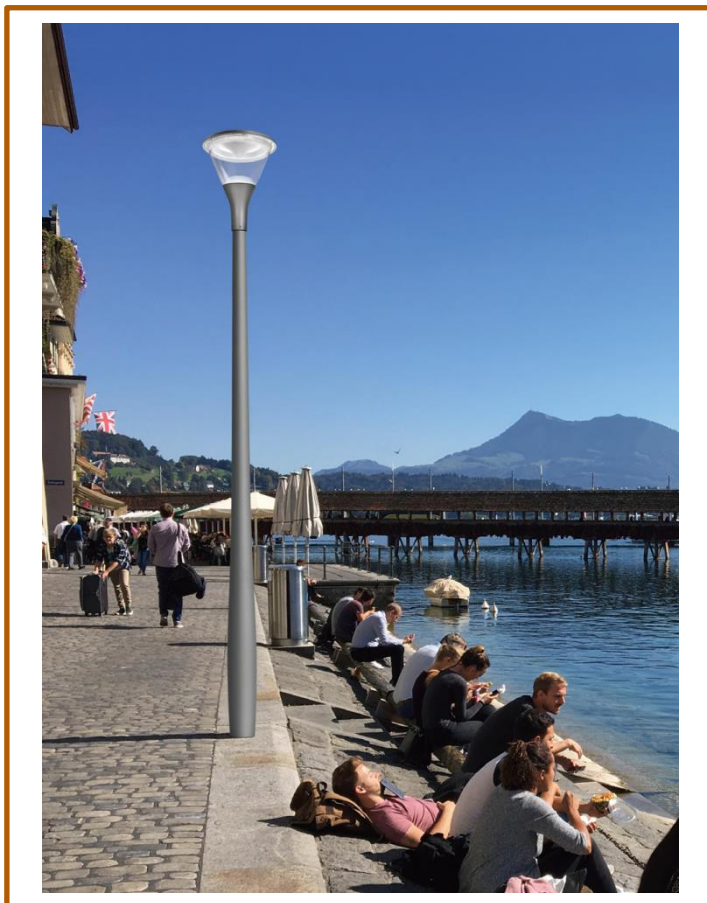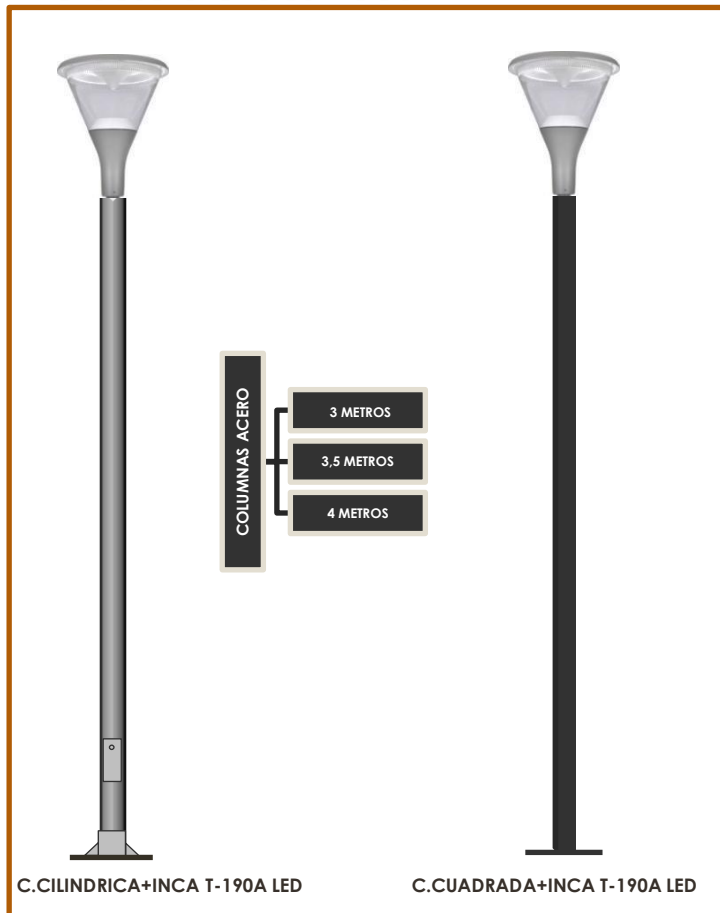



BRAZO VERSUS

**BRAZO ACERO VALIDO PARA PARED
O COLUMNAS.
REFUERZO CARTABON DE 4m/m
DISPONIBLE EN MEDIDAS DE 700m/m-1000m/m
POSICION VERTICAL 3/4
GALVANIZADO EN-UNE-1461 PINTADO AL
HORNO RAL A ELEGIR POR CLIENTE.
PESO: 6KG**



**OPCIONAL
ESCUDO MUNICIPAL**



LUMINARIA INCA T-190A LED

