


**FOCOS EMPOTRABLES IP-68  
ACERO INOXIDABLE**




**REF:M-03**

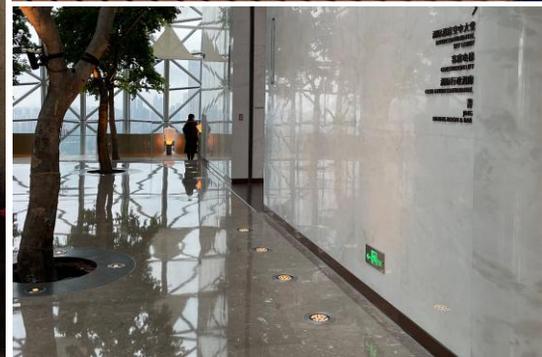

EMPOTRABLE LED M-03  
6W-4000K 100LM/W-Nº LEDS:3  
MATERIAL:ALUMINIO Y INOXIDABLE 316  
IP:68 IK-10  
VIDIO TEMPLADO  
VOLTAJE:220V

**600Lm**




**REF:M-04**



EMPOTRABLE LED M-04  
12W-4000K 100LM/W-Nº LEDS:6  
MATERIAL:ALUMINIO Y INOXIDABLE 316  
IP:68 IK-10  
VIDIO TEMPLADO  
VOLTAJE:220V

**1200Lm**




**REF:M-05**



EMPOTRABLE LED M-05  
25W-4000K 100LM/W-Nº LEDS:12  
MATERIAL:ALUMINIO Y INOXIDABLE 316  
IP:68 IK-10  
VIDIO TEMPLADO  
VOLTAJE:220V

**2500Lm**



## DESCRIPCION

- Cuerpo de aluminio fundido a presión, marco de acero inoxidable 304.
- Vidrio templado endurecido de 10 mm más alto, asegura pasar la prueba estándar IK10.
- Anillo de goma de silicona resistente a altas temperaturas e impermeable, carcasa de instalación de plástico PP resistente a la corrosión.
- Luminaria empotrable de suelo/suelo/pared aplicaciones previstas según necesidad.
- Sin riesgo fotobiológico, según EN 62471:2008.
- Todos los tornillos externos están hechos de acero inoxidable 304.